

STANDARD PRODUCT CHARACTERISTICS

Media	100% gradient dual density synthetic media
Frame	100% high impact plastic
Max. Temperature	150°F
Max. Humidity	100% relative humidity
Flammability	Classified per UL Standard 900
Height Tolerance	±1/8"
Width Tolerance	±1/8"
Depth Tolerance	±1/16"
Final Resistance	Recommended 1.5"w.g.

AVAILABLE PRODUCT OPTIONS

ASHRAE EFF.	MERV 11, 13, 15
HEADER	3/4" single header construction available
GASKETING	Upstream, downstream, and side gasketing available

PRODUCT DIMENSIONAL DATA

Nominal Size (H"xW"xD")	Actual Size (H"xW"xD")	Approx. Weight (lbs.)	Media Area (sq.ft.)	CFM Capabilities	
				375 fpm	500 fpm
12 x 12 x 2	11-3/8 x 11-3/8 x 1-3/4	0.9	12	375	500
20 x 12 x 2	19-3/8 x 11-3/8 x 1-3/4	1.5	20	625	833
24 x 12 x 2	23-3/8 x 11-3/8 x 1-3/4	1.8	23	750	1000
20 x 16 x 2	19-3/8 x 15-3/8 x 1-3/4	2.0	26	833	1111
24 x 16 x 2	23-3/8 x 15-3/8 x 1-3/4	2.4	31	1000	1333
20 x 18 x 2	19-3/8 x 17-3/8 x 1-3/4	2.3	29	938	1250
24 x 18 x 2	23-3/8 x 17-3/8 x 1-3/4	2.7	35	1125	1500
20 x 20 x 2	19-3/8 x 19-3/8 x 1-3/4	2.5	33	1042	1389
24 x 20 x 2	23-3/8 x 19-3/8 x 1-3/4	3.0	39	1250	1667
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	3.6	47	1500	2000

ASHRAE 52.2 PERFORMANCE DATA (24x24x2 @500 fpm)

Model	M-11	M-13	M-15
MERV	11	13	15
Initial Resistance ("w.g.)	0.27	0.36	0.46

SPECIFICATION INFORMATION

Customer Information: _____

Item Number: _____


For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

SPECIFIED OPTIONS

Customer Initial and Date for Product Specification _____

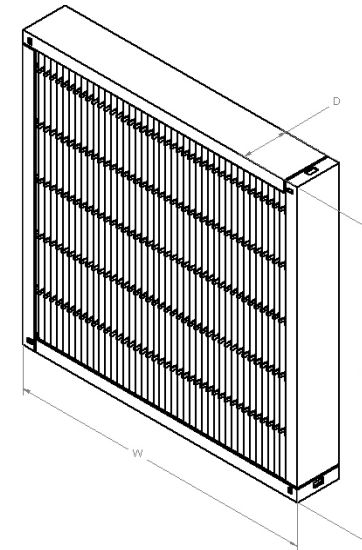

AEROSTAR NEXFIL® Mini-Pleat Filters

Rev | BC | Date: 10/31/2017 | Drawing Number: | Revision:

FiltrationGroupIAQ.com

SD-NEXFIL

06