ECO-TOUCH® Pgrm Wall Control

Touchscreen multi-function dehumidistat

Item Number: 44929

• 20 minutes ventilation / 40 minutes recirculation, speed selectable mode
• Relative humidity display
• Preferences for desired indoor relative humidity
• ECO Mode will automatically choose the best operating settings based on the home's current conditions
• LCD backlit tough screen
• Ventilation movement is displayed on screen
• No battery to replace




Application

Technologically advanced and feature-rich; the ECO-TOUCH® provides contractors and homeowners with a higher level of control over indoor air quality. The MAX mode gives you the extra ventilating power you need to quickly clear the air by taking advantage of the system's powerful fans. During MAX mode, the system exchanges indoor air for outdoor air at maximum speed for a desired period of 20, 40 or 60 minutes.

Technical parameters

Dimensions and weights		
Weight	1	lb

Dimensions

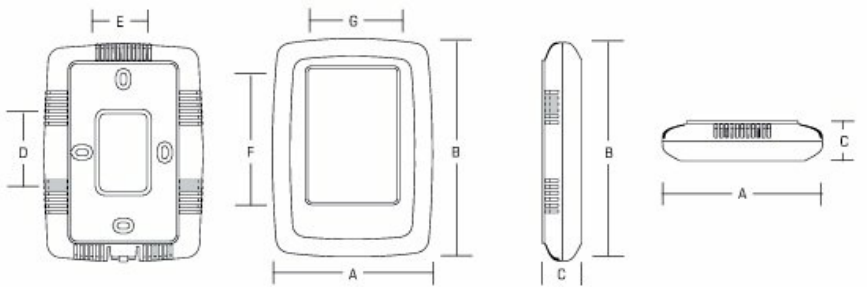

A	B	C	D	E	F	G
3 5/8 (91)	4 7/8 (124)	7/8 (22)	3/4 (44)	1 1/16 (27)	3 (75)	2 (50)

Dimensional information is in inches (mm)

Documents

- 422530 ECO-TOUCH SPEC SHEET EN.PDF
- 413702 ECOTOUCH BROCHURE ENG.PDF
- 422528 ECO-Touch Operation manual.pdf
- 400608 ECO-TOUCH INSTALLATION MANUAL.PDF
- ECO-TOUCH VIDEO.MP4