


KASON Industries, Inc

0058 Radial Tongue Latch Installation Instructions

SHEET 1 OF 2


For Safe operation use KASON ISR's Models:
0481C, 0482C, 0486C, 0487C, 0489C, 0481SC

⚠ See Inside Release (ISR) Instructions for more details


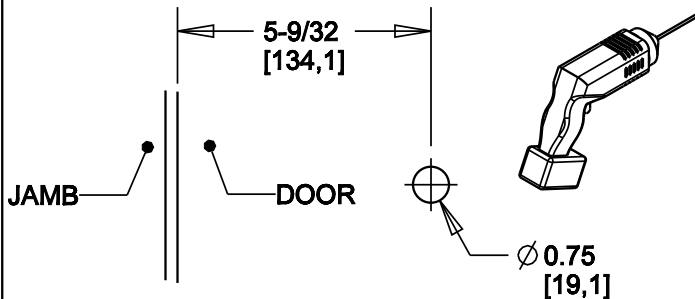


0058 Series Latch


Align backplate feature
with ISR hole

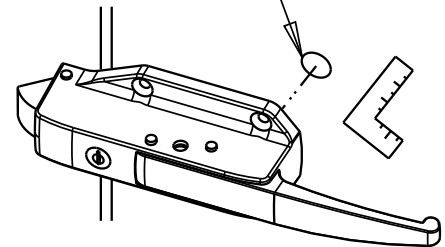

Ø 1/4 (6mm) Mounting fasteners not provided

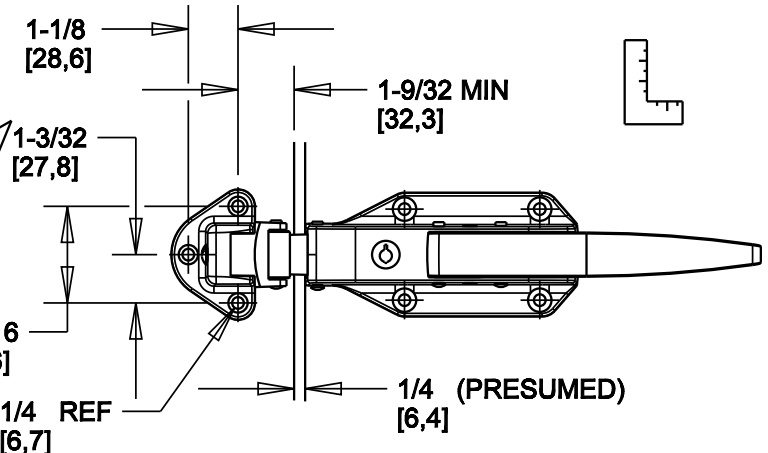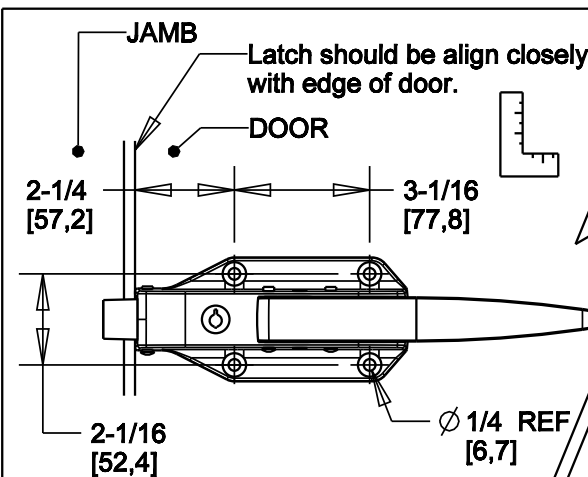


0059 Series Strike

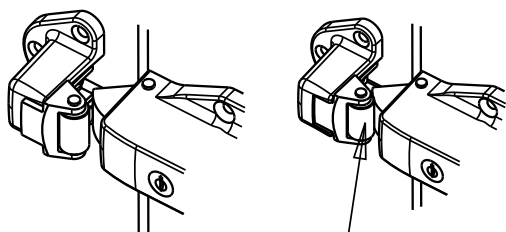


ADJUST TO
MAKE CONTACT

TIGHTEN
OUTSIDE
SCREW



TIGHTEN
INSIDE
SCREW



0058 Series Strike
available, not shown

Light Spring, Cylinder Model
10058CL5020 Cylinder Locking Body

Light Spring, Non-Cylinder Model
10058L05021 Body

Strike	Offset
10059005001	Strike, -1/8" to 1/4" (-3.2 to 6.4mm)
10059005002	Strike, 3/4" to 1-1/2" (19.0 to 38.1mm)
10059005003	Strike, 1-3/4" to 2-1/2" (44.5 to 63.5mm)

Above Models for Chrome finish.
Other finished, springs available.



WARNING

This item may contain chemicals known to cause
cancer or reproductive harm in the State of California.


WWW.P65Warnings.ca.gov

IS-0058 01-December-2017


LOCKING OPERATION

SHEET 2 OF 2


1. CLOSE DOOR

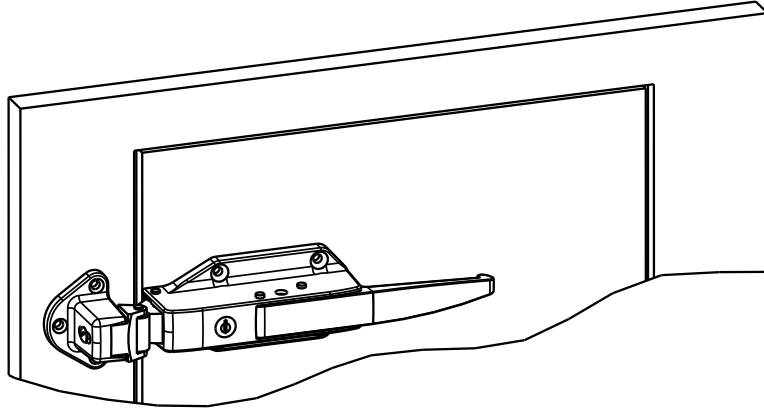

2. LOCK LATCH

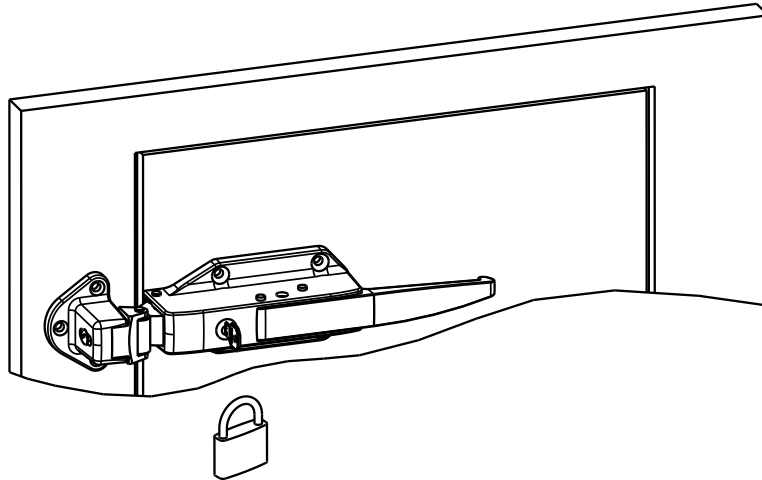

3. UNLOCK LATCH
4. OPEN DOOR
5. LEAVE THE LATCH UNLOCKED

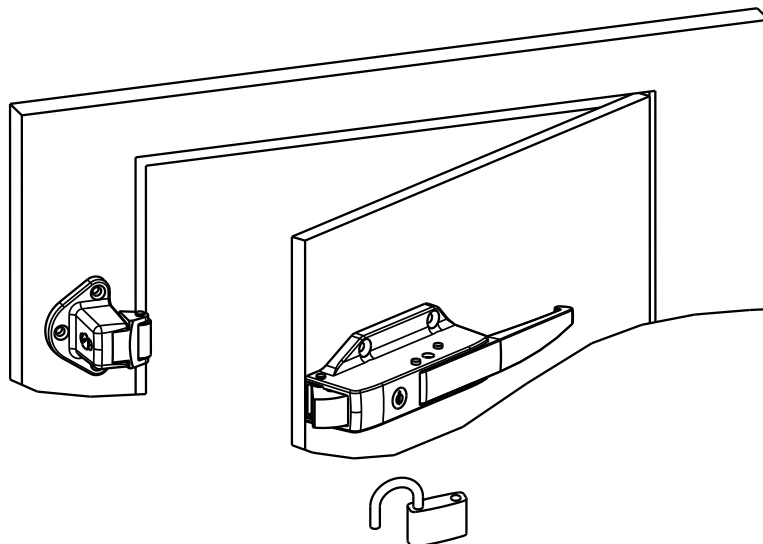

WARNING

DO NOT LOCK THE LATCH WHEN CLOSING THE DOOR