General Technical Information


Single V-BELTS - wrapped construction 3L, Aor4L, Bor5L, C, D, 3V, 5V, 8V, 5VK, 8VK, SPZ, SPA, SPB, SPC

BESTORQ® single, wrapped V-belts are engineered for reliable power transmission across a wide range of industrial applications.


Engineered in the USA with high-performance materials, these belts provide consistent performance, durability, and long service life.

All belts of the same size are manufactured to run interchangeably as a matched set, simplifying replacement and maintenance when multiple belts are used on the same drive.

CLASSICAL

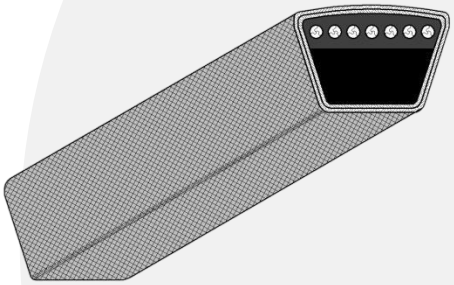

WEDGE

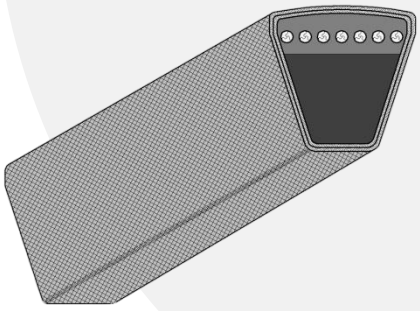

BUILT FOR SUPERIOR PERFORMANCE

Outer fabric wrap: Treated with an oil- and heat-resistant fabric wrap engineered for excellent wear resistance and durability.

Tensile cords: Helically wound cords are specially engineered, twisted, heat-treated, and chemically set for strength and consistent performance.

Thunder series belts: 5VK and 8VK belts feature helically wound aramid tensile cords engineered and twisted to provide maximum horsepower ratings with minimal stretch.


Rubber body: Engineered synthetic rubber formulated for cool operation, flexibility, and crack resistance, plus strong adhesion to the outer fabric and tensile cords.

- ***Exceed USA ARPM rating levels and standards***
- ***Thousands of hours of testing***
- ***Matched-set compatibility for all cross sections***

Dimensions

	TOP WIDTH	THICKNESS	ANGLE
3L	.38”	.24”	40
Aor4L	.51”	.34”	40
Bor5L	.66”	.43”	40
C	.87”	.57”	40
D	1.26”	.89”	40
3V	.38”	.33”	40
5V	.62”	.53”	40
8V	1.00”	.96”	40
5VK	.62”	.53”	40
8VK	1.00”	.96”	40
SPZ	.38”	.32”	40
SPA	.51”	.42”	40
SPB	.66”	.52”	40
SPC	.87”	.65”	40

V-Belt Cross-Section Nomenclature

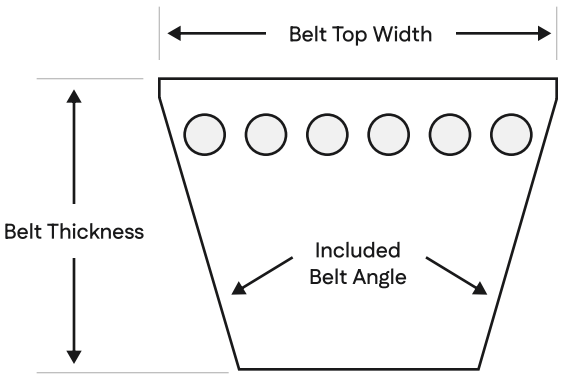

BESTORQ 6955 McCormick Drive, Lincoln, NE 68507 | ph 877.773.9966 | fx 877.329.8416 | bestorq.com