SAMSUNG

SUBMITTAL PC4NUFMAN

Samsung DVM S Series, 4-Way Cassette Fascia Panel (Wind-Free™)

Job Name _____ Location _____

Purchaser _____ Engineer _____


Submitted to _____ Reference ☐ Approval ☐ Construction ☐

Unit Designation _____ Schedule # _____



Specifications

- Fascia panel for Samsung Wind-Free™ 4-Way cassette indoor units (AM0**NN4DCH/AA, AC0**NN4DCH/AA)
- HIPS chassis certified to UL94 V0
- 4 X motorized, auto swing louvers with
- Independent louver control capability (32° - 65° louver control range)
- Built-in IR receiver for optional wireless control
- Four LED lights to display power status, filter reminder, error status, defrost notification, and timer functions (where applicable)
- The panel shall include 1 X electrostatic, washable, pleated filters and all necessary mounting hardware as standard
- Louvers and panel display are powered and controlled by the indoor unit PCB
- Panel corners are removable to easily level unit and adjust height
- Accommodates Samsung motion sensor (MCR-SMC) for occupancy sensing capability
- The Wind-Free™ function will close the supply air outlet louvers while in cooling mode to gently disperse cool air into the space without blowing directly onto occupants. The Wind-Free™ features are optional and can be enabled using central or local control options. (MWR-SH11N, MWR-WE13N, AR-EH03U only)
- The Wind-Free™ panel has an integral humidity sensor that will open the louvers for standard cooling mode when space conditions could potentially cause condensation formation on the panel surface.
- Dimensions (L X W X H): 37 3/8" X 37 3/8" X 2 1/2"
- Weight: 13.88 lbs.

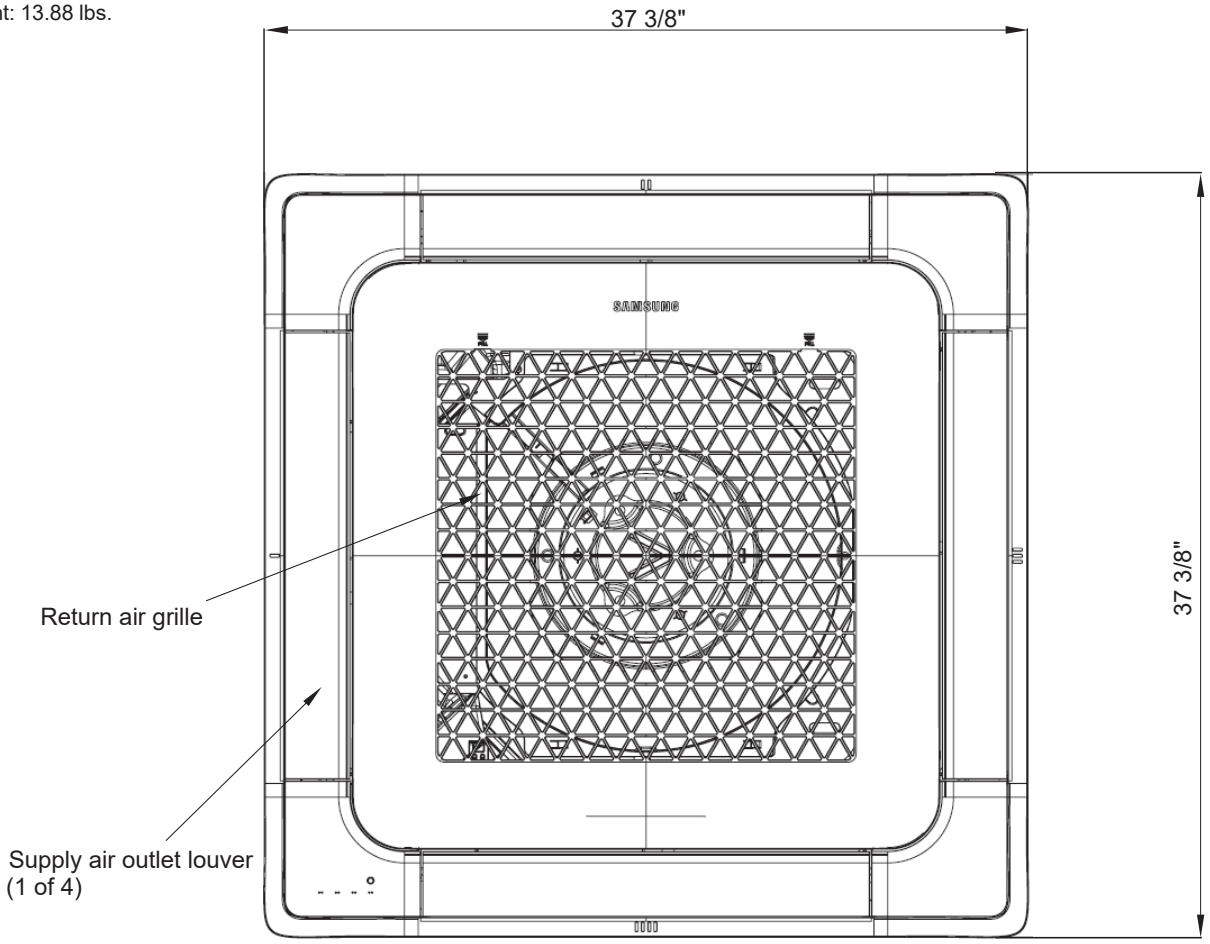

Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.

© 2018 Samsung HVAC

SHA-DVMS-04032018

www.SamsungHVAC.com

888-699-6067