STANDARD PRODUCT CHARACTERISTICS	
Media	100% wet-laid micro-fiberglass or 100% gradient density synthetic media
Frame	High impact plastic and galvanized steel
Max. Temperature	150°F
Max. Humidity	100% relative humidity
Flammability	Classified per UL Standard 900
Height Tolerance	±1/8"
Width Tolerance	±1/8"
Depth Tolerance	±1/16"
Header Thickness	3/4"
Final Resistance	Recommended 1.5"w.g.

AVAILABLE PRODUCT OPTIONS	
ASHRAE EFF.	MERV 11, 13, 14, 15
HEADER	Standard single header
GASKETING	Upstream, downstream, and side gasketing available

PRODUCT DIMENSIONAL DATA			
Nominal Size (H"xW"xD")	**Actual Size (H"xW"xD")**	**Approx. Weight (lbs.)**	**Media Area (sq.ft.)**
12 x 24 x 12	**11-3/8 x 23-3/8 x 10-3/4**	5.5 FP 4.7 FP-S	45 FP 35 FP-S
20 x 24 x 12	**19-3/8 x 23-3/8 x 10-3/4**	7.5 FP 6.6 FP-S	81 FP 63 FP-S
24 x 24 x 12	**23-3/8 x 23-3/8 x 10-3/4**	9.0 FP 8.2 FP-S	97 FP 77 FP-S

ASHRAE 52.2 PERFORMANCE DATA (24x24x12 @500 fpm)				
Model	**Titan FP-11**	**Titan FP-13**	**Titan FP-14**	**Titan FP-15**
MERV	11	13	14	15
Initial Resistance ("w.g.)	0.28	0.51	0.52	0.59
Model	**Titan FP-S-11**	**Titan FP-S-13**	**Titan FP-S-14**	**Titan FP-S-15**
MERV	11	13	14	15
Initial Resistance ("w.g.)	0.21	0.24	0.35	0.48

SPECIFICATION INFORMATION

Customer Information: _____

_____

Item Number: _____


For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

SPECIFIED OPTIONS

Customer Initial and Date for Product Specification _____

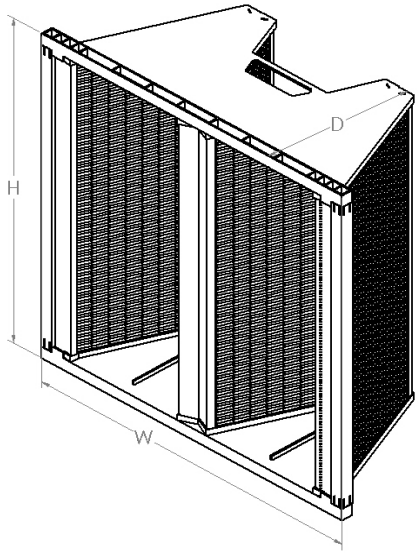

FG Indoor Air Quality

AEROSTAR

AEROSTAR Titan FP and Titan FP-S Mini-Pleat

FiltrationGroupIAQ.com

Rev	BC	Date:	10/25/2017	Drawing Number:	Revision:
App	PW	Date:		**SD-MP-Titan FP_FPS**	