

FEATURES

- Over 50 years of unit expertise and design
- Self-contained Heating and Cooling Packaged Unit
 - No need for outdoor units, line sets, or separate venting
 - Pre-wired and pre-charged

REFRIGERANT SYSTEM

- High-efficiency compressor standard on all models
- EWC*12P30 includes a two-stage high-efficiency compressor
- Copper tubing with enhanced aluminum fin coils
- Slide-out Cooling chassis for ease of service
- Anti-microbial evaporative drain pan

BLOWER

- Multi-speed blower motor for diverse airflow range
- Resilient motor mounts for smooth and quiet operation
- Internal washable filter is standard

CONTROLS

- Conventional 24V thermostat
 - One Stage Cool/Heat required up to 2 tons
 - Two Stage Cool/One Stage Heat for 2.5-ton model
- Color-coded wiring for ease of installation and service
- Diagnostic LED
- Easily accessible control box


WARRANTY

- Five (5) Year Limited Parts Warranty

EWC MODEL UNITS ELECTRIC HEATING / ELECTRIC COOLING PACKAGED UNITS



MODEL NUMBER GUIDE

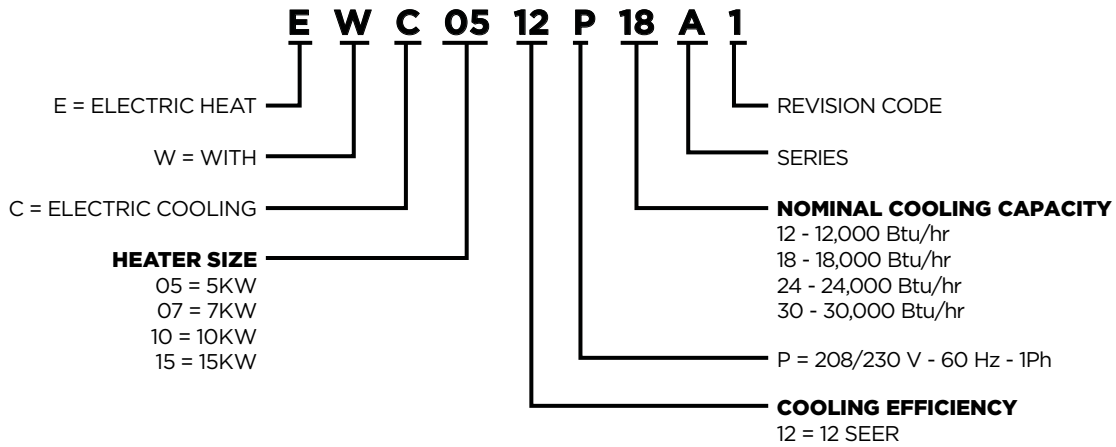

ELECTRICAL AND PHYSICAL DATA

Model	Voltage/Hz/Phase	Voltage Range	MCA ¹				MOCP ²				Compressor		Outside Fan				Indoor Blower				R410A Charge	Approx. Weight (lbs.)									
			CKT1		CKT2		CKT1		CKT2		Rated Load Amps	Locked Rotor Amps	Dia	Nominal RPM	Rated Load Amps	HP	Wheel Dia x Width	Rated Load Amps	HP												
			208V	240V	208V	240V	208V	240V	208V	240V																					
EWC0512P12A	208-230/60/1	197-253	23.3	26.6	N/A	N/A	25.0	30.0	N/A	N/A	4.9	27.0	18.0	1075	0.9	1/8	10 x 4.5	1.3	1/2	45	284										
EWC0712P12A			34.1	39.1			35.0	40.0			6.7	37.5										1.8	1/4	58	302						
EWC0512P18A			23.3	26.6			25.0	30.0			10.2	61.6										1100	2.8	1/3	57	333					
EWC0712P18A			34.1	39.1			35.0	40.0																			12.0	78.1	1200	60	339
EWC1012P18A			45.0	51.6			45.0	60.0																			12.0	78.1	1200	60	339
EWC1012P24A			46.3	53.0			50.0	60.0																							
EWC1512P24A			24.7	28.0			43.3	50.0			25.0	30.0										45.0	50.0								
EWC1012P30A			46.3	53.0			N/A	N/A			50.0	60.0										N/A	N/A	12.0	78.1	1200	60	339			
EWC1512P30A			24.7	28.0			43.3	45.0			30.0	30.0										45.0	50.0	12.0	78.1	1200	60	339			

¹ MCA = Minimum Circuit Ampacity
² MOCP = Maximum Over Current Protection

PERFORMANCE

Model	Cooling				Heating			
	Btuh	SEER	S/T	CFM	240V		208V	
					kW/Hr	Btu/Hr	kW/Hr	Btu/Hr
EWC0512P12A	12,000	12	0.75	480	4.8	16,300	3.6	12,300
EWC0712P12A					7.2	24,600	5.4	18,400
EWC0512P18A	17,000	12	0.75	560	4.8	16,300	3.6	12,300
EWC0712P18A					7.2	24,600	5.4	18,400
EWC1012P18A					9.6	32,700	7.2	24,600
EWC1012P24A	22,800	12	0.75	770	9.6	32,700	7.2	24,600
EWC1512P24A					14.4	49,100	10.8	36,900
EWC1012P30A	27,000	12	0.75	945	9.6	32,700	7.2	24,600
EWC1512P30A					14.4	49,100	10.8	36,900

BLOWER PERFORMANCE

SUPPLY AIRFLOW PERFORMANCE (SCFM) AS A FUNCTION OF EXTERNAL STATIC PRESSURE							
Model	Indoor Blower Speed	Unit Voltage (V)	0.1" w.c.	0.2" w.c.	0.3" w.c.	0.4" w.c.	0.5" w.c.
EWC0512P12A	TAP 1 (HEAT) *	208 or 230	615	590	570	545	525
	TAP 2 (HEAT)	208 or 230	655	630	610	590	570
	TAP 3 (HEAT)	208 or 230	795	780	760	745	725
	TAP 4 (COOL) †	208 or 230	480	460	440	415	390
	TAP 5 (COOL)	208 or 230	530	505	485	460	430
EWC0712P12A	TAP 1 (HEAT)	208 or 230	615	590	570	545	525
	TAP 2 (HEAT) *	208 or 230	655	630	610	590	570
	TAP 3 (HEAT)	208 or 230	795	780	760	745	725
	TAP 4 (COOL) †	208 or 230	480	460	440	415	390
	TAP 5 (COOL)	208 or 230	530	505	485	460	430
EWC0512P18A EWC0712P18A	TAP 1 (HEAT)	208 or 230	805	785	770	750	730
	TAP 2 (HEAT) *	208 or 230	825	805	785	770	750
	TAP 3 (HEAT)	208 or 230	910	890	875	860	845
	TAP 4 (COOL) †	208 or 230	560	540	520	500	475
	TAP 5 (COOL)	208 or 230	610	580	560	535	505
EWC1012P18A	TAP 1 (HEAT)	208 or 230	805	785	770	750	730
	TAP 2 (HEAT)	208 or 230	825	805	785	770	750
	TAP 3 (HEAT) *	208 or 230	910	890	875	860	845
	TAP 4 (COOL) †	208 or 230	560	540	520	500	475
	TAP 5 (COOL)	208 or 230	610	580	560	535	505
EWC1012P24A	TAP 1 (HEAT)	208 or 230	805	785	770	750	730
	TAP 2 (HEAT)	208 or 230	825	805	785	770	750
	TAP 3 (HEAT) *	208 or 230	910	890	875	860	845
	TAP 4 (COOL) †	208 or 230	770	750	730	710	690
	TAP 5 (COOL)	208 or 230	820	790	770	750	730
EWC1512P24A	TAP 1 (HEAT)	208 or 230	805	785	770	750	730
	TAP 2 (HEAT)	208 or 230	825	805	785	770	750
	TAP 3 (HEAT) *	208 or 230	910	890	875	860	845
	TAP 4 (COOL) †	208 or 230	770	750	730	710	690
	TAP 5 (COOL)	208 or 230	820	790	770	750	730
EWC1012P30A	TAP 1 (HEAT) *	208 or 230	825	805	785	770	750
	TAP 2 (HEAT)	208 or 230	910	890	875	860	845
	TAP 3 (COOL) †	208 or 230	530	510	490	465	440
	TAP 4 (COOL)	208 or 230	570	545	530	505	480
	TAP 5 (COOL) †	208 or 230	945	920	900	885	865
EWC1512P30A	TAP 1 (HEAT)	208 or 230	825	805	785	770	750
	TAP 2 (HEAT) *	208 or 230	910	890	875	860	845
	TAP 3 (COOL) †	208 or 230	530	510	490	465	440
	TAP 4 (COOL)	208 or 230	570	545	530	505	480
	TAP 5 (COOL) †	208 or 230	945	920	900	885	865

NOTE: EWC**30A models shipped with Low and High stage Cooling taps connected for use of the two-stage system.

* As shipped speed for Heating operation

† As shipped speed for Cooling operation


COOLING PERFORMANCE EXTENDED RATINGS

Model	Indoor Temp DB/WB °F	Outdoor Temperature - DB °F														
		65			85			95			105			115		
		Btuh	S/T	kW	Btuh	S/T	kW	Btuh	S/T	kW	Btuh	S/T	kW	Btuh	S/T	kW
EWC**12P12A	85/72	16,600	0.62	0.91	15,100	0.65	1.08	13,800	0.68	1.22	12,400	0.73	1.32	11,100	0.77	1.46
	80/67	15,400	0.69	0.92	13,900	0.74	1.07	12,500	0.77	1.21	11,300	0.84	1.31	9,700	0.89	1.45
	75/63	14,400	0.71	0.92	12,700	0.78	1.06	11,300	0.81	1.21	10,100	0.88	1.31	8,500	0.94	1.44
	75/57	13,100	1.00	0.92	11,900	1.00	1.06	10,800	1.00	1.20	9,600	1.00	1.30	8,200	1.00	1.43
EWC**12P18A	85/72	21,200	0.58	1.22	19,900	0.60	1.50	18,600	0.63	1.59	17,100	0.65	1.73	15,700	0.69	1.87
	80/67	20,000	0.66	1.22	18,600	0.72	1.49	17,200	0.73	1.59	15,700	0.79	1.72	14,100	0.80	1.86
	75/63	19,100	0.69	1.22	17,400	0.73	1.49	15,700	0.76	1.58	14,300	0.78	1.71	12,600	0.83	1.85
	75/57	16,800	1.00	1.22	15,600	1.00	1.48	14,300	1.00	1.57	13,100	1.00	1.70	11,500	1.00	1.84
EWC**12P24A	85/72	31,100	0.61	1.73	28,300	0.62	2.01	25,600	0.65	2.28	23,400	0.67	2.53	21,100	0.71	2.76
	80/67	28,400	0.67	1.71	25,700	0.69	2.00	23,000	0.73	2.27	20,900	0.75	2.52	19,100	0.79	2.74
	75/63	26,100	0.70	1.70	23,700	0.73	1.97	21,300	0.76	2.25	19,500	0.78	2.51	17,400	0.82	2.74
	75/57	22,500	1.00	1.69	21,200	1.00	1.95	19,800	1.00	2.23	18,500	1.00	2.51	16,800	1.00	2.72
EWC**12P30A	85/72	37,000	0.72	2.41	30,800	0.69	2.83	30,700	0.67	3.08	22,200	0.61	3.29	25,400	0.73	3.62
	80/67	36,700	0.69	2.44	29,700	0.81	2.82	27,400	0.75	3.04	24,200	0.83	3.30	22,400	0.82	3.57
	75/63	33,600	0.63	2.48	22,900	0.87	2.79	25,300	0.78	3.00	22,800	0.81	3.25	20,500	0.85	3.52
	75/57	30,900	1.00	2.50	28,100	1.00	2.79	23,600	1.00	2.97	21,500	1.00	3.22	19,500	1.00	3.51


ACCESSORIES

Description	Kit #	Where Used
Wall Sleeve	CA239	All EWCs
Decorative External Louver Clear Anodized Aluminum	ALVR42	
Decorative External Louver Painted Aluminum	ALVR42P	

UNIT DIMENSIONS

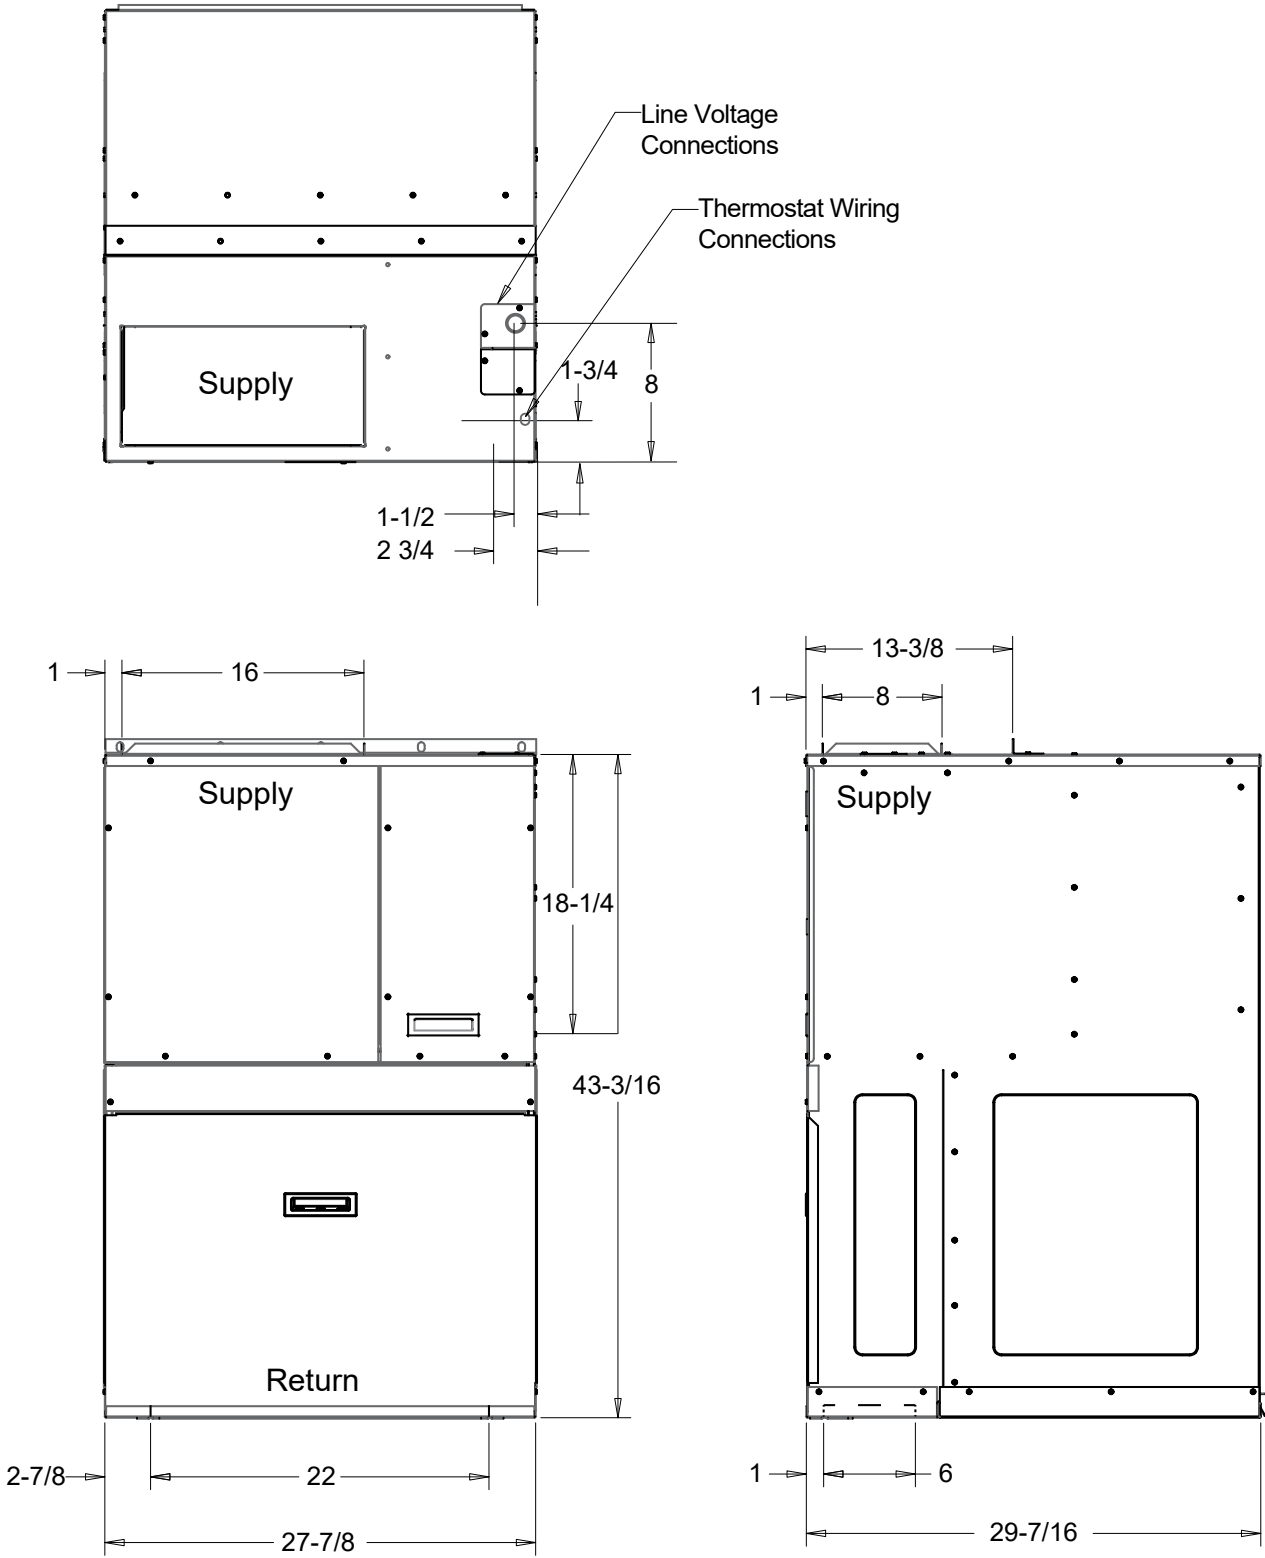

WALL SLEEVE DIMENSIONS

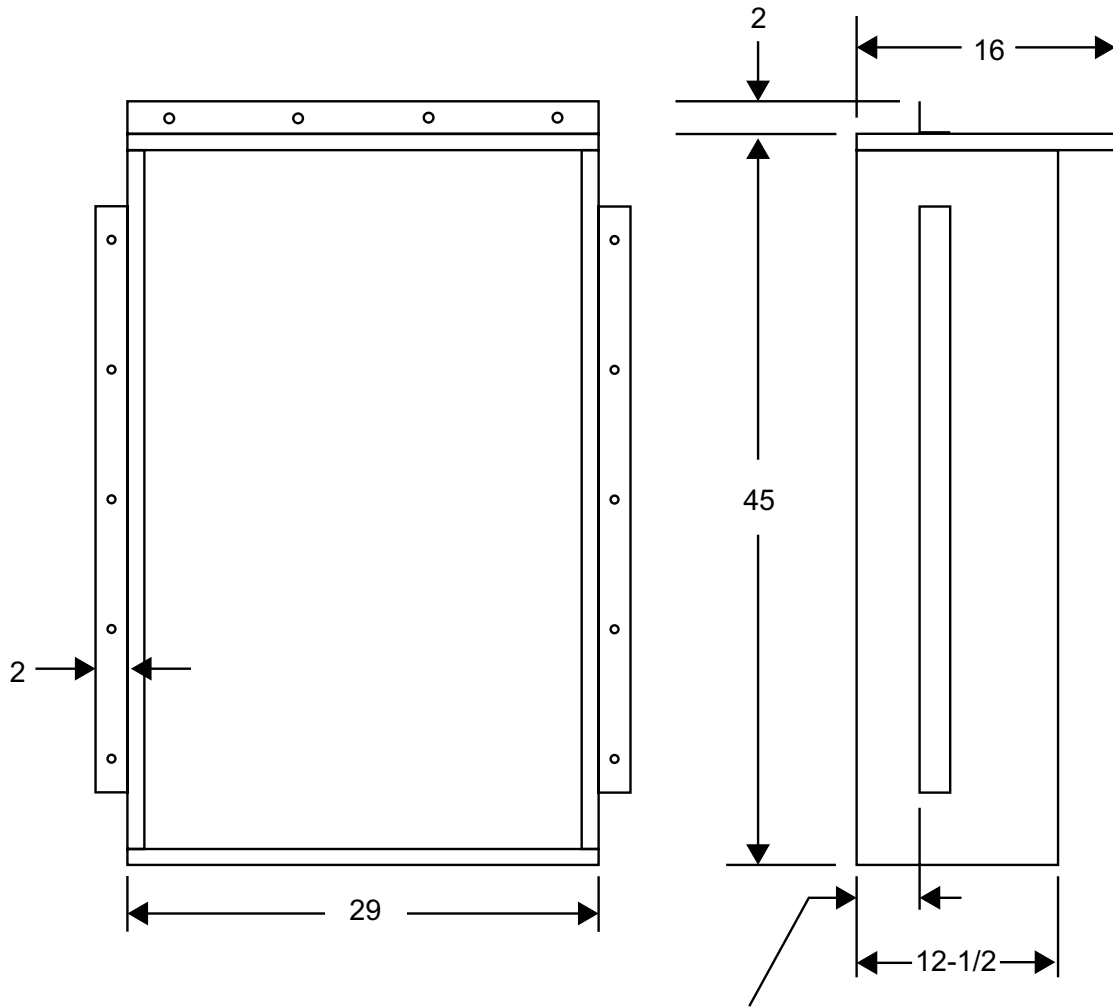

Flange may be assembled
1" or 3-3/4" from front of sleeve



215 Metropolitan Drive | West Columbia, SC 29170
800-448-5872
Product Support 866-282-7257
www.magic-pak.com

All specifications and illustrations subject to change
without notice and without incurring obligations.